

» PDP-1

Pragmatic Digital Player

Simple, Powerful, Affordable Digital Player

- ✓ Energy efficient high-performance design
- ✓ Easy audio and video playback from local storage
- ✓ Optional 500 GB local storage
- ✓ 10/100/1000 Ethernet Interface
- ✓ Network streaming Audio and video playback
- ✓ Optional WiFi 802.11 b/g/n
- ✓ FHD 1920x1080p on HDMI output
- ✓ Stereo Audio Output on 3.5mm jack
- ✓ Optional Digital Audio Output on Coaxial jack
- ✓ Optional Digital Inputs/Outputs for device control
- ✓ Optional RS-232, RS-485 and CAN bus interface
- ✓ Easy to create playlists and playback schedules and upload via Ethernet or USB
- ✓ Lower total cost of ownership (TCO)



TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@pragmatic1.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783



Cost Efficient/Energy Efficient

The PDP-1 player is very cost-efficient, energy-efficient unit for deployment in cost sensitive digital signage applications.

Ideal for a variety of applications

Optional WiFi interface, RS-232, RS485 and CAN bus interface enables strategic placement of screens in multiple locations. Pragmatic's PDP-1 is an ideal digital signage player for commercial, healthcare and pharmacy applications.

Scalable


When your business grows, the PDP-1 grows as well. The PDP-1 systems can be expanded to deliver content up to 300 screens in a campus environment.

Specifications

SUPPORTING PROTOCOLS	TCP/IP, HTTP
CONNECTORS	10/100/1000 Ethernet, USB 2.0, mini-stereo audio, DC power jack
DISPLAY	HDMI
AUDIO	Mini stereo analog, (Coaxial Digital Audio Output optional)
NETWORK	10/100/1000 Ethernet (WiFi 802.11 b/g/n optional)
USB	x2
DECODING	Video MPEG-1, 2, 4; H.263, H.264, VC-1. Audio MPEG-1 (layers 1 & 2), MP3
STREAMING PROTOCOL	Types: HTTP, local file playback
RESOLUTIONS	640x480, 800x600, 1024x768, 1280x1024, 1280x768, 1366x768, 1920x1080p
IMAGE FILE FORMATS	JPEG, PNG
SCANNING FORMAT	SDTV 480i, EDTV 480p, HDTV 720p, 1080i, 1080p
SCREEN ROTATION	Landscape, portrait (+90°, -90°)
POWER	DC 5V (max)
OPERATING CONDITIONS	Temperature 50°-104°F (10°-40°C), Humidity 20-85% (non-condensing)
DIMENSIONS (HxWxD)	1.75" x 6" x 5.25"
WEIGHT	Net 3lb
REGULATIONS	UL, cUL, FCC (Class A/B), TUV, CCC, CE, LVDS, CB, BSMI, CISPR, RoHS
PACKAGE CONTENTS	Media player, remote control w/batteries, AC adapter
WARRANTY	One year limited warranty on parts and labor

Digital Signage In:
Hospitals, Pharmacies, Medical clinic,
Shopping Malls, Hotel Lobbies, Restaurants,
Boutique shops, College campus, Sports Bar,
Health & Fitness Clubs, Retail stores, Casinos, etc.

- RELATED PRODUCTS**
- CATS-HD (HDMI distribution amplifier)
 - Control-9 (total room control)
 - PHA (compact directional speakers)
 - SAA (compact Stereo Audio Amplifier)

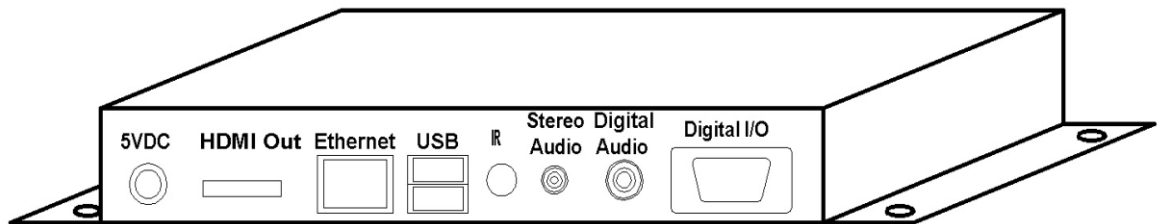

TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@pragmatic1.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783