

» PPS-KIT2

Suspension Installation Kit for High-performance Pendant Speakers


Installation Style 1:

The PPS-KIT2 can be used in two different installation styles. The first style is to install the Pragmatic pendant speaker as shown in the picture below as looped through a guy wire.



Step 1:

Loop the steel wire cable through the seismic anchor point of the speaker as shown below. Secure the steel ferrule to the steel wire cable with the setscrews and a 2mm hex key (not provided in the kit) as shown.

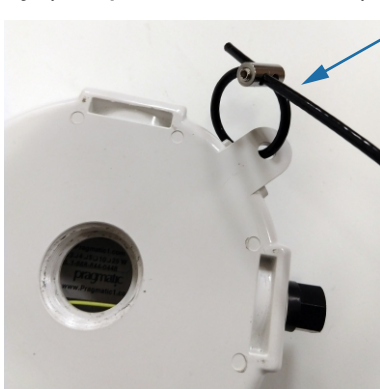

Contents:

Steel Wire Cable with sleeve: 3 ft. length

Steel Threaded Ferrules: Qty. 2

Steel Setscrews: Qty. 4



Applications:

• Applications in hotels, fitness clubs, restaurants, theme parks, shopping malls, grocery stores, etc.

Step 2:

Repeat step 1 to the other seismic anchor point so the speaker is as shown below.




TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@pragmatic1.com, Call Us: (408) 748-1100

» PPS-KIT2

Suspension Installation Kit for High-performance Pendant Speakers

Step 3:

Confirm that both loops on the seismic anchor points are secured properly and the loop of steel wire cable is compliant as shown in the picture below.

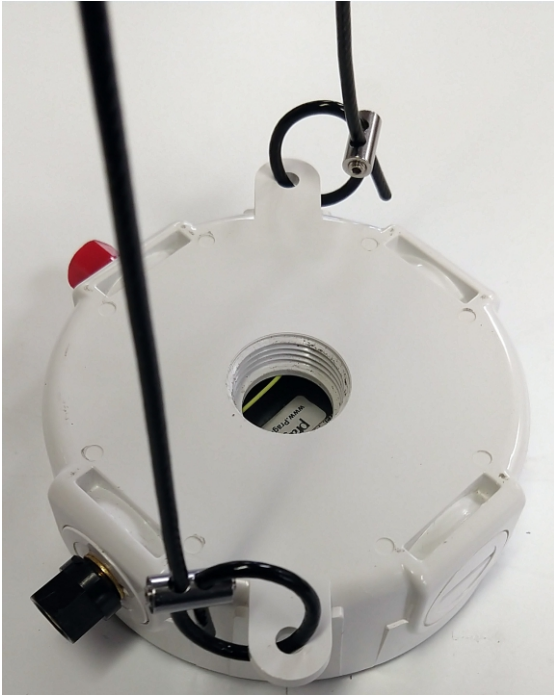

Step 4:

Suspend the speaker from the ceiling with a steel guy wire or chain as shown in the figure here.



TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@pragmatic1.com, Call Us: (408) 748-1100

» PPS-KIT2

Suspension Installation Kit for High-performance Pendant Speakers

Installation Style 2:

The second style to install the Pragmatic pendant speaker is as shown in the picture below as looped through a guy wire.




Step 1:

Loop the steel wire cable through both the seismic anchor points of the speaker as shown here. Secure one steel ferrule to the steel wire cable with the setscrews and a 2mm hex key (not provided in the kit) as shown. Hold the steel cable vertically straight to make sure that the pendant speaker is level before tightening the setscrews on this ferrule.

Step 2:

Make a loop of the steel wire cable and pass it through the second ferrule as shown in the figure below. Before securing the setscrews on the ferrule, make sure that the speaker suspends properly and at even level.

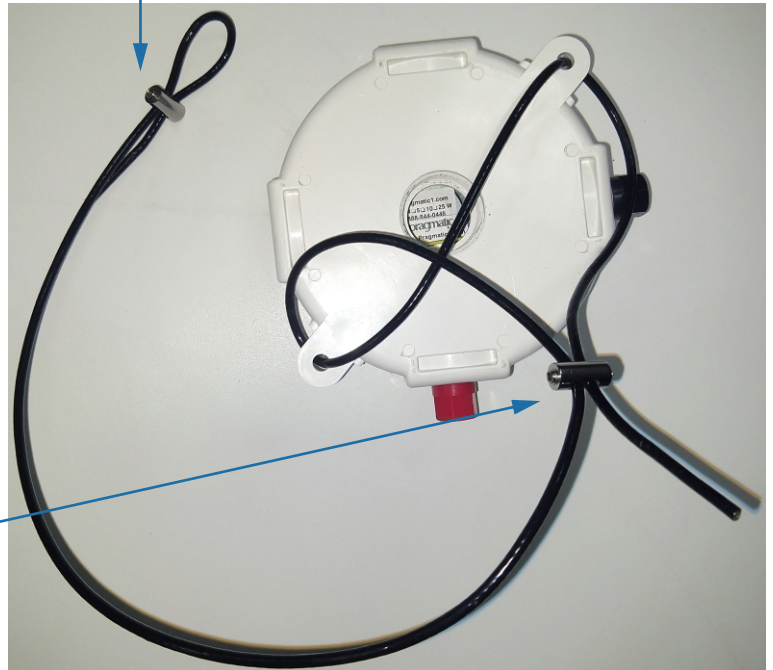


TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@pragmatic1.com, Call Us: (408) 748-1100

» PPS-KIT2

Suspension Installation Kit for High-performance Pendant Speakers

Step 3:

Confirm that both loops made by the ferrules are secured properly and the loop of steel wire cable is compliant and the speaker is level when suspended as shown in the picture below.

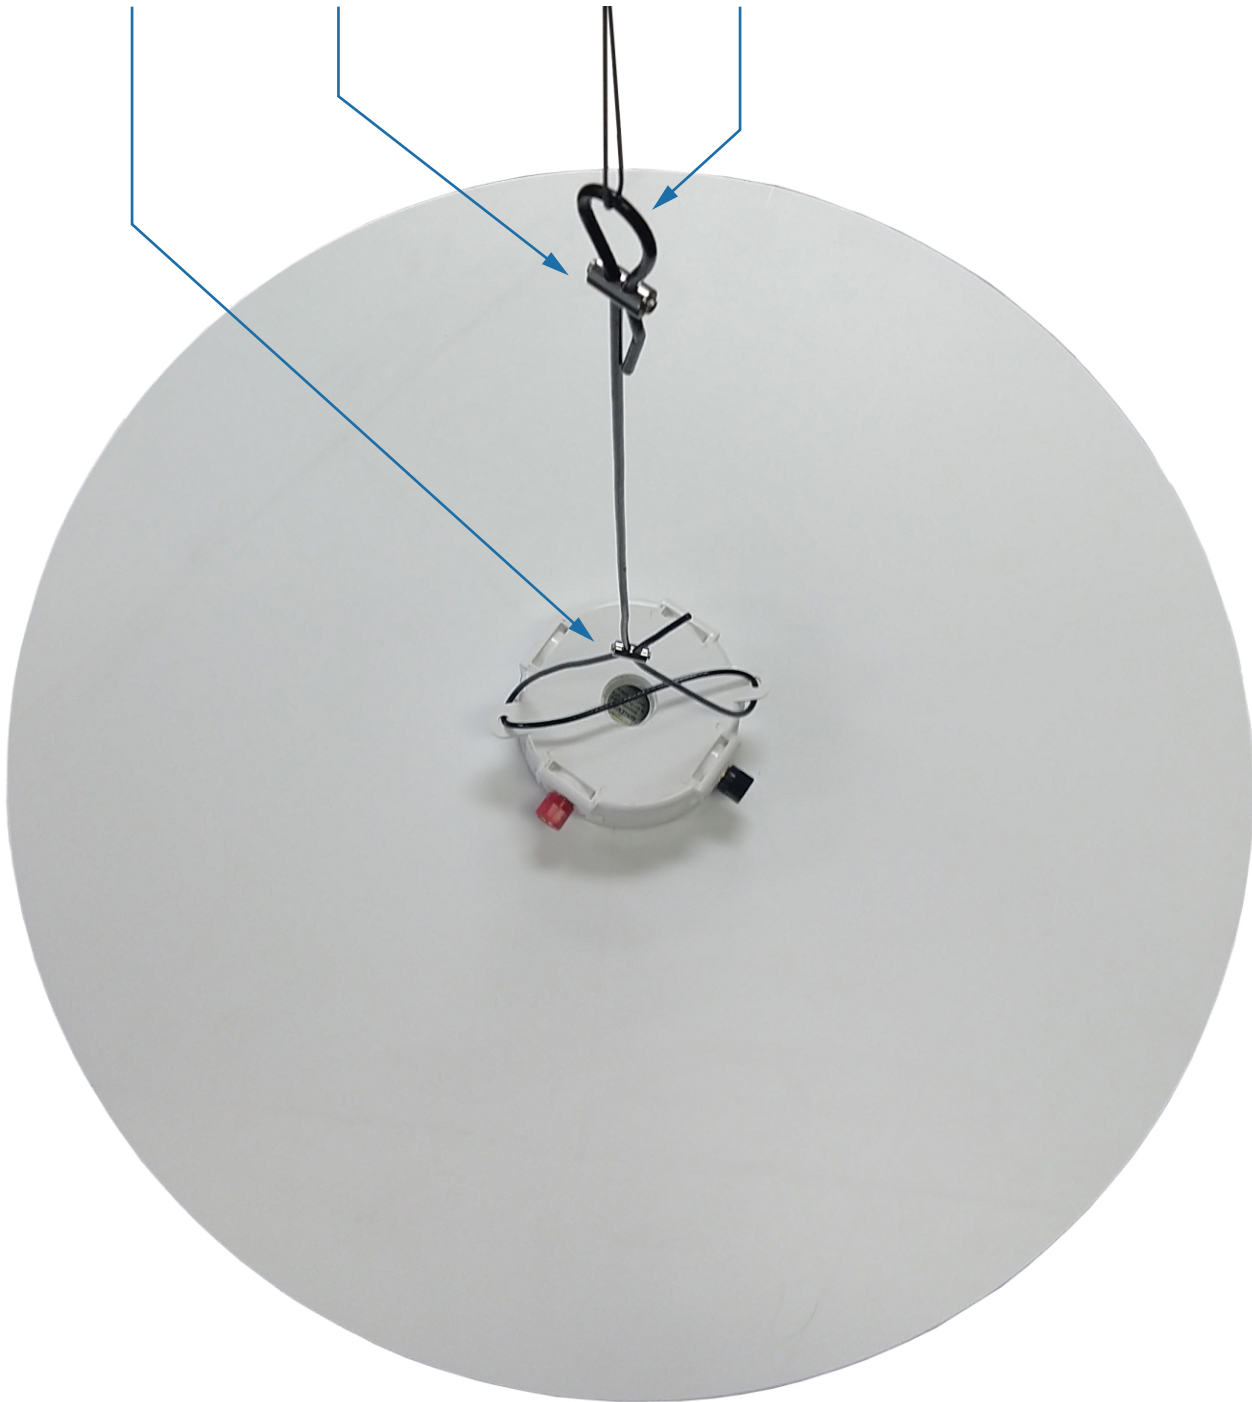

TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@pragmatic1.com, Call Us: (408) 748-1100