

## » DMS™ 4.4

Distributed Music System

### Distributed Music System

The DMS™ 4.4 is a complete multi-source, multi-zone music distribution system with control on a single category 5 wire. It is ideal for restaurants, offices, schools, sports bars, places of worship, manufacturing, production area, and numerous other applications. Its maximum distance on category 5 wires is 1000 ft. from the hub. The DMS™ 4.4 allows you to select from one of four different audio sources in each zone. It features a high-performance built-in TV / CATV and FM tuner as the main source. Three additional external sources can be connected to the main distribution hub. Each zone is connected to the main hub by a single category 5 wire.

The in-wall amplifiers with keypads are locally powered (can be centrally powered on an 18 / 2 AWG along with the category 5) and are home run to the main unit. The DMS™ 4.4 has built-in IR remote control distribution. Serial port control of the system allows easy integration with lighting control systems, building automation system, and many others. A PC can also be configured to control the system.

The DMS™ 4.4 system delivers high-quality audio at an affordable price. It is a simple yet elegant system that provides unequalled sound quality with cables running up to 250 feet per zone. It distributes audio signals to four listening areas using only a single category 5 wire. Further, each zone is capable of independently selecting any source. The system also features a source selection function, using an IR remote control or a keypad. By cascading additional DMS™ 4.4, the system can be expanded in increments of four zones per unit. Each category 5 wire run ends into an IWA (In Wall Amplifier), for amplification and control.



#### Feature & Benefits:

- Easily integrated with TPA™ receiver and the MBA™ amplifier
- High quality audio
- Affordable price
- Easy to operate
- Simple Installation
- Works off inexpensive wires
- Eliminates the need for rewiring
- Cable runs up to 250 ft per zone
- Expandable in 4-zone increments
- Incredible sound quality and video detail
- Built-in TV/CATV/FM Stereo Tuner
- Source selection function using an IR Remote Control or keypad
- 4 sources
- 4 zones

#### Specifications:

Continuous Power: 24 watts/channel  
 Peak Power: 60 watts/channel  
 Frequency Response: 20 Hz to 20KHz  
 Power Source: 12V DC  
 Dynamic Range: > 100 db  
 Signal-to-Noise Ratio: > 100 dB  
 Maximum distance: 1000'


#### Applications:

- Multiple room audio system in residential markets
- Audio and Video supplied to rooms on category 5 wires
- In-wall amplification to rooms
- Cable runs up to 1000 ft.
- Commercial installations in hotels, restaurants, sports bars, shopping malls, arcades, theme parks, gyms, etc.

\*US and International patents pending

**TO PLACE an ORDER or for QUESTIONS,**  
**Emails Us: [sales@pragmatic1.com](mailto:sales@pragmatic1.com), Call Us: (408) 748-1100 or Fax Us: (408) 663-9783**

### Typical Application

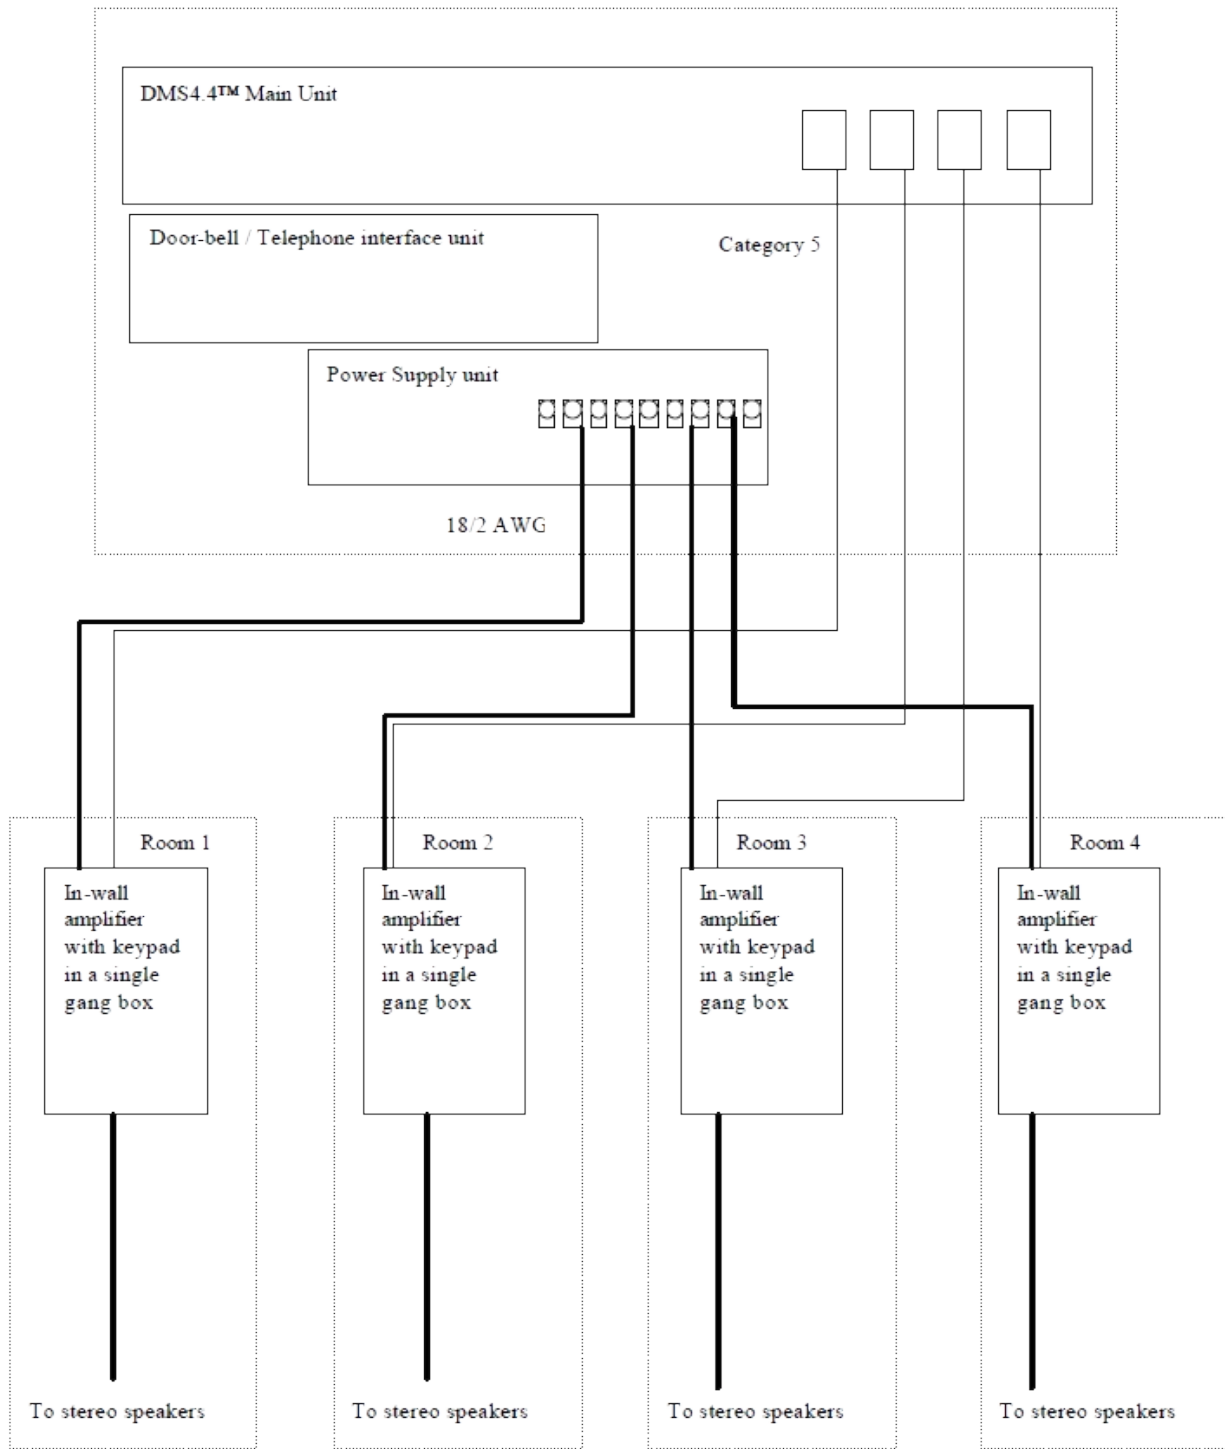

\*US and International patents pending

**TO PLACE an ORDER or for QUESTIONS,**  
**Emails Us: [sales@pragmatic1.com](mailto:sales@pragmatic1.com), Call Us: (408) 748-1100 or Fax Us: (408) 663-9783**